

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number  
**WO 2004/031091 A1**

(51) International Patent Classification<sup>7</sup>: C03C 25/10,  
C08G 18/67, C08F 290/06

(21) International Application Number:  
PCT/EP2002/011202

(22) International Filing Date: 7 October 2002 (07.10.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): PIRELLI  
& C. S.p.A. [IT/IT]; Via Gaetano Negri, 10, I-20123 Mi-  
lano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ROBA, Giacomo,  
Stefano [IT/IT]; Via Arno, 5/10, I-20052 Monza (IT).  
TERRUZZI, Lidia [IT/IT]; Via Luigi Cadorna, 6, I-20050  
Triuggio (IT). FOGLIANI, Sabrina [IT/IT]; Via Fratelli  
Cervi, 7, I-20090 Segrate (IT). CASTELLANI, Luca

[IT/IT]; Via Copernico, 19/D, I-20094 Corsico (IT).  
RESMINI, Emiliano [IT/IT]; Via Nicastro, 6, I-21052  
Busto Arsizio (IT). DONETTI, Rafaella [IT/IT]; Via  
10 Martini, 16, I-28074 Ghemme (IT). GRASSI, Lisa  
[IT/IT]; Via Neri, 13, I-20146 Milano (IT).


(74) Agents: GIANNESI, Pier Giovanni et al.; Pirelli & C.  
S.p.A., Viale Sarca, 222, I-20126 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: OPTICAL FIBER WITH CURED POLYMERIC COATING

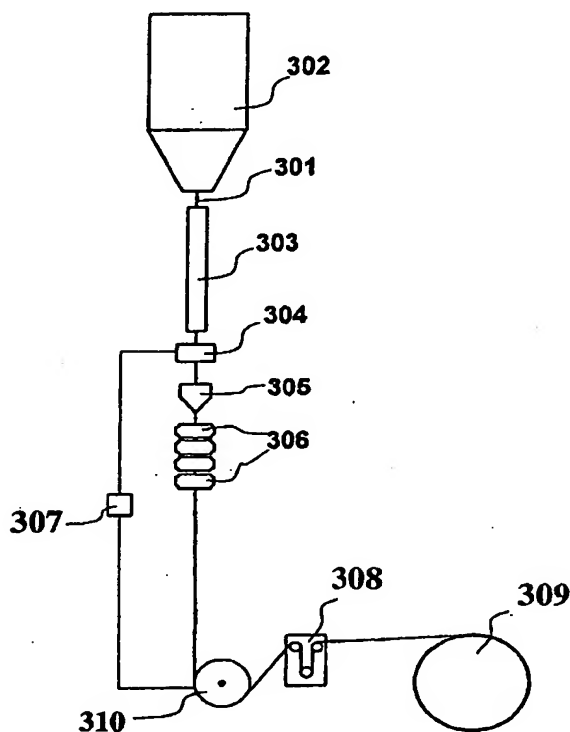

(57) Abstract: Optical fiber comprising: a) a glass portion; b) at least one protective coating layer disposed to surround said glass portion; said protective coating layer having a modulus of elasticity value between -40 °C and +60 °C comprised between 5 MPa and 600 MPa, preferably not higher than 500 MPa, more preferably not higher than 450 MPa, much more preferably not higher than 300. Preferably, said protective coating layer is a single protective coating layer which is disposed in contact with said glass portion.

WO 2004/031091 A1



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*